



The Clear Choice
Water Filtration Systems

www.aquafilter.com

EXCITO-B

**5 Stage Ultrafiltration System
based on "QM" Cartridge Type**



General Description:

EXCITO-B is a economical five stage, ultra-filtration water system, using a modern line of "QM - QUICK CONNECTOR MALE" water filter cartridges.

This Aquafilter professional water filtration system is economical and easy to use. Perfectly cleans the water from many types of water pollution, bacteria and some viruses. Innovative Aquafilter water filter cartridges "QM QUICK CONNECTOR MALE", based on "PUSH IN - PUSH OUT" for quick replacement, requiring no special tools or the use of additional sealants such as Teflon tape .

This ultra-filtration technology system removes contaminants from water of 0.02 microns including most bacteria and some viruses.

In each filter cartridge, Aquafilter uses innovative **BACINIX™** nanosilver technology, providing anti-bacterial protection.

Features:

- High quality
- Competitive pricing
- Fast product delivery
- Innovative **BACINIX™** nanosilver technology, providing antibacterial protection
- Made in EU
- Compact, undercounter, and apartment size
- Designed to remove contaminants of size 0.02 micron (capillary technology - ultra-filtration)
- Innovative inserts: a "QM" does not require the use of additional sealants
- Manufactured from FDA CFR-21 compliant materials
- Five Stages of Filtration
- Easy to install with System Specifications
- Systems equipped with modern faucet and all installation accessories

Recomendations for Use:

- Point-of-Use (POU) systems can filter out bad tastes, colors or odors, which pose no health risk but still affect the water quality
- This system will improve the flavor of water used for drinking and cooking
- Perfect for almost any household and will easily fit into any space
- Kitchen compact, undercounter, home and apartment size
- Recommended for Families





The Clear Choice
Water Filtration Systems


EXCITO-B

5 Stage Ultrafiltration System based on "QM" Cartridge Type



Specifications:

Dimensions (H x W x L): 438 x 100 x 360 (mm)
Connection adapter: 1/2"
Working Temp.: 2°C - 45°C (36°F - 113°F)
Flow rate: 1,9 l/m (0.6 gpm)
Working Pressure: 3.5 bar (52.5 PSI)

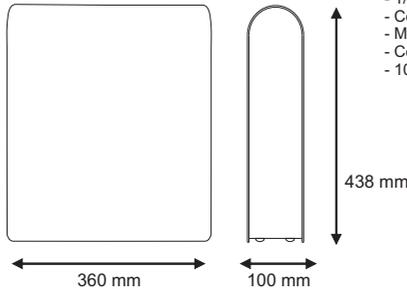

The package contains:


- Cartridge Type include in set EXCITO-B: AIPRO-20M-QM, AISTRO-2-QM, AICRO-3-QM, AICRO-4-QM
- UF membrane element type: TLCHF-2T
- Long Reach Chrome Faucet: FXFCH17-C
- Feed water connector 1/2"
- 1/4" inch Tubing for System Connection
- Completely Assembled
- Manual instructions
- Color box
- 100% Factory Tested and Sterilized Ready for Installation



In each filter cartridge, Aquafilter uses innovative **BACINIX™** nanosilver technology, providing anti-bacterial protection.

CATALOG#	STAGE	COMPONENT	FUNCTION
AIPRO-20M-QM	1	Sediment Spun-bounded polypropylene	Removes suspended impurities like particles, rust and sediment not less than 20 microns.
AISTRO-2-QM	2	Ion exchange High quality ion exchange resin	Step 1: Water hardness reduction. Step 2: Reduces the concentration of iron.
AICRO-3-QM	3	Carbon Cartridge Activated carbon coconut shell	
AICRO-4-QM	4	Carbon Cartridge & KDF® Activated carbon coconut shell with KDF®	Step 1: KDF® showing bacteriostatic capacity, protects against the development of other deposits of bacteria. Reduces the levels of iron and heavy metals. Step 2: Final reduction of chlorine, pesticides, organic substances and a final improved taste and odor of the water.
TLCHF-2T	5	Ultrafiltration (UF) membrane Ultrafiltration separation mechanism is commonly attributed to the pore size of the membrane as low as 0,02 micron	Rejects or separates high molecular weight solutes as well as suspended solids, colloids, and macromolecules, bacteria and some viruses.

Additional accessories

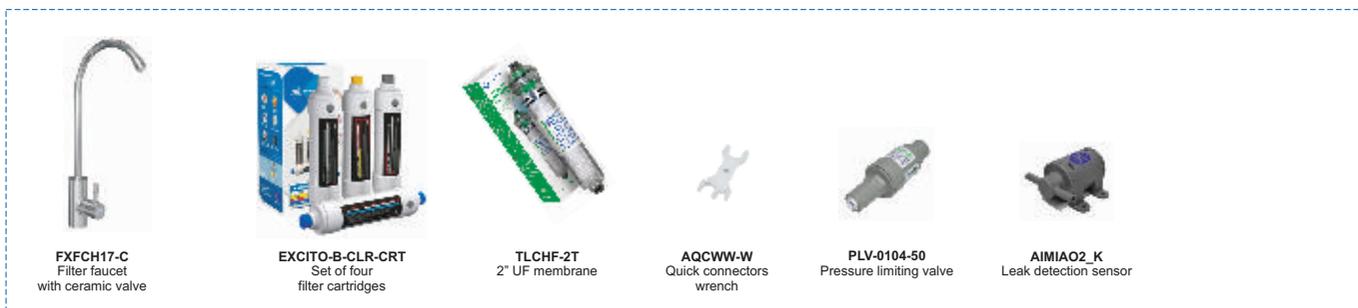

NOTE

- Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.
- Water filtration systems can help reduce the presence of contaminants. In addition, some water filtration systems can help reduce the presence of microorganisms or other contaminants with potential health effects.
- We strongly recommend regularly scheduled maintenance and replacement of the filter cartridge in order for the product to perform properly.
- Replace the filter cartridge at least every 3 or 6 months (depending on water quality).
- UF membrane recommended to change every 12 months (depending on water quality).
LIMITED WARRANTY: Manufacturer warrants that this product is free from defects in materials and workmanship. This warranty, together with any and all warranties implied by law, shall be limited to a period of two (2) years from the date of original purchase.
This limited warranty does not apply to failures that result from abuse, misuse, alteration or failure to properly comply with installation, or cartridge change instructions.
We strongly recommend adding to all point of use filtration systems a Pressure Limiting Valve (PLV-0104 series) to guard against unwanted extreme water pressure events pressure increases, surges, and water hammer which could occur

All Aquafilter images, trademarks, logos, and other intellectual property are the sole and exclusive property of Aquafilter, Inc. and may not be used without our express written permission.

Aquafilter Manufacturing Facility


Aquafilter Inc.
Hunt Valley 21030, USA
us@aquafilter.com


Aquafilter Germany
15234 Frankfurt, Germany
de@aquafilter.com


Aquafilter Europe
91-222 Lodz, Poland
pl@aquafilter.com

